



Perfil H - abas paralelas

Bitola mm x kg/m	Massa Linear kg/m	d mm	b _f mm	Espessura		h mm	d' mm	Área cm ²
				t _w mm	t _f mm			
W 150 x 22,5	22,5	152	152	5,8	6,6	139	119	29,0
W 150 x 29,8	29,8	157	153	6,6	9,3	138	118	38,5
W 150 x 37,1	37,1	162	154	8,1	11,6	139	119	47,8
W 200 x 35,9	35,9	201	165	6,2	10,2	181	161	45,7
W 200 x 41,7	41,7	205	166	7,2	11,8	181	157	53,5
W 200 x 46,1	46,1	203	203	7,2	11,0	181	161	58,6
W 200 x 52,0	52,0	206	204	7,9	12,6	181	157	66,9
HP 200 x 53,0	53,0	204	207	11,3	11,3	181	161	68,1
W 200 x 59,0	59,0	210	205	9,1	14,2	182	158	76,0
W 200 x 71,0	71,0	216	206	10,2	17,4	181	161	91,0
W 200 x 86,0	86,0	222	209	13,0	20,6	181	157	110,9
HP 250 x 62,0	62,0	246	256	10,5	10,7	225	201	79,6
W 250 x 73,0	73,0	253	254	8,6	14,2	225	201	92,7
W 250 x 80,0	80,0	256	255	9,4	15,6	225	201	101,9
HP 250 x 85,0	85,0	254	260	14,4	14,4	225	201	108,5
W 250 x 89,0	89,0	260	256	10,7	17,3	225	201	113,9
W 250 x 101,0	101,0	264	257	11,9	19,6	225	201	128,7
W 250 x 115,0	115,0	269	259	13,5	22,1	225	201	146,1
HP 310 x 79,0	79,0	299	306	11,0	11,0	277	245	100,0
HP 310 x 93,0	93,0	303	308	13,1	13,1	277	245	119,2
W 310 x 97,0	97,0	308	305	9,9	15,4	277	245	123,6
W 310 x 107,0	107,0	311	306	10,9	17,0	277	245	136,4
HP 310 x 110,0	110,0	308	310	15,4	15,5	277	245	141,0
W 310 x 117,0	117,0	314	307	11,9	18,7	277	245	149,9
HP 310 x 125,0	125,0	312	312	17,4	17,4	277	245	159,0
W 360 x 91,0	91,0	353	254	9,5	16,4	320	288	115,9
W 360 x 101,0	101,0	357	255	10,5	18,3	320	286	129,5
W 360 x 110,0	110,0	360	256	11,4	19,9	320	288	140,6
W 360 x 122,0	122,0	363	257	13,0	21,7	320	288	155,3

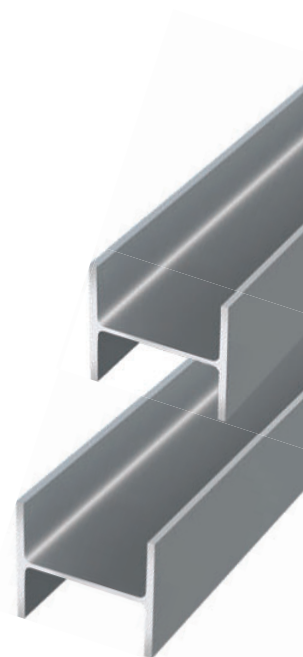

- Comprimentos de 12m ou 6m.
- Atende à Norma ASTM A 572. Grau 50.
- Outros tamanhos poderão ser fornecidos mediante consulta prévia.



- d = altura do perfil
- d' = altura livre da alma
- h = altura interna
- b_f = largura da aba do perfil
- t_f = espessura da aba
- t_w = espessura da alma
- R = raio de concordância